




How to order 5mm or 1/4" (6mm) Glass for the Century Railing System

Residential installation only. Commercial applications may differ.
Always check with local building codes prior to purchasing and installing this product.

Step 1: Locate posts in desired locations making sure all posts are plumb and level.

Step 2: Maintain a maximum of up to 75" spacing between center of posts.

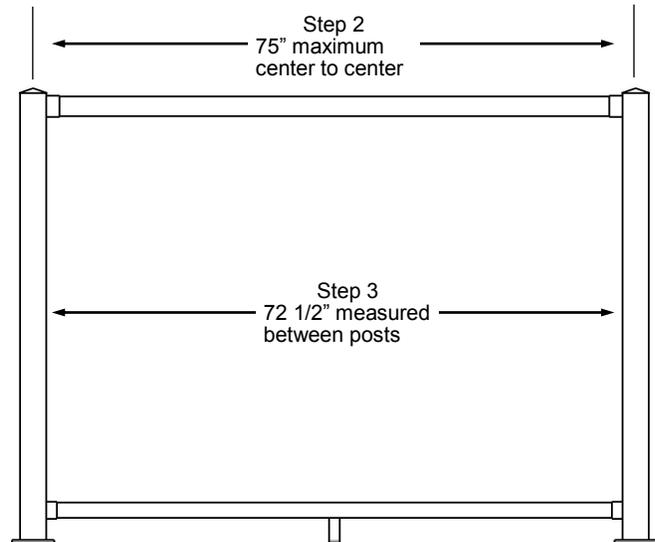


Step 3: Measure distance between inside of posts and deduct 3" from total measurement. ie: post to post measurement = 72 1/2".

$$72 \frac{1}{2} - 3 = 69 \frac{1}{2}$$

Order glass 69 1/2" W x 37 5/16" H

Note: Glass cannot be cut once tempered.

Step 4: All glass is ordered standard height, 37 5/16" high with minimum edgework (arrised) on all 4 sides.

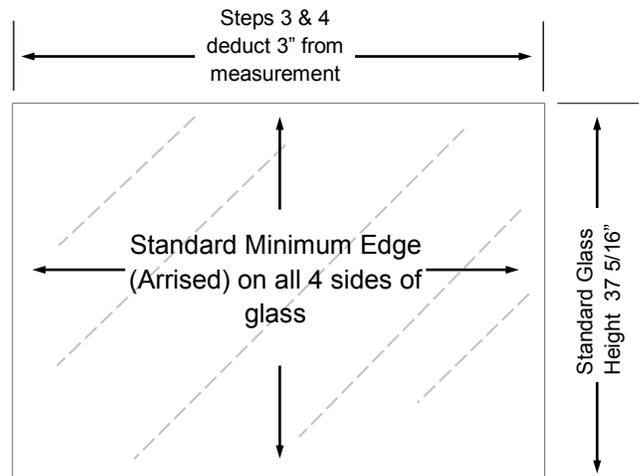

Standard Glass Height is 37 5/16"

For 36" High Railing, Glass is 31 5/16"

Note: Glass panels may cause injury if mishandled. Gloves and safety glasses should be worn at all times.

When Glass Railing is being used as a guardrail, do not exceed the 75" center to center spacing as this is outside our engineering spec and is at the end users own risk and could result in a failed inspection. It is the sole responsibility of the home owner/contractor to comply with local building codes.

9685 Agur St. Summerland B.C. V0H 1Z2
Phone: 778-516-6250 Fax: 778-516-6003 Toll Free 1-888-493-1103
www.centuryrailings.com